



HydrauPack 450

Features

- Diesel driven hydraulic power unit
- Pump flow electronically controlled from 0-100%
- Open hydraulic circuit with electronic pressure and flow control
- Intelligent electronic control system
- Sound-insulated
- Electric transfer pump to fill hydraulic tank

Benefits

24/7

24/7 (de)mobilisation, installation and commissioning



Maintenance during the project




Guaranteed flexibility and high availability



Clear budget and manageable costs

Specifications HP450

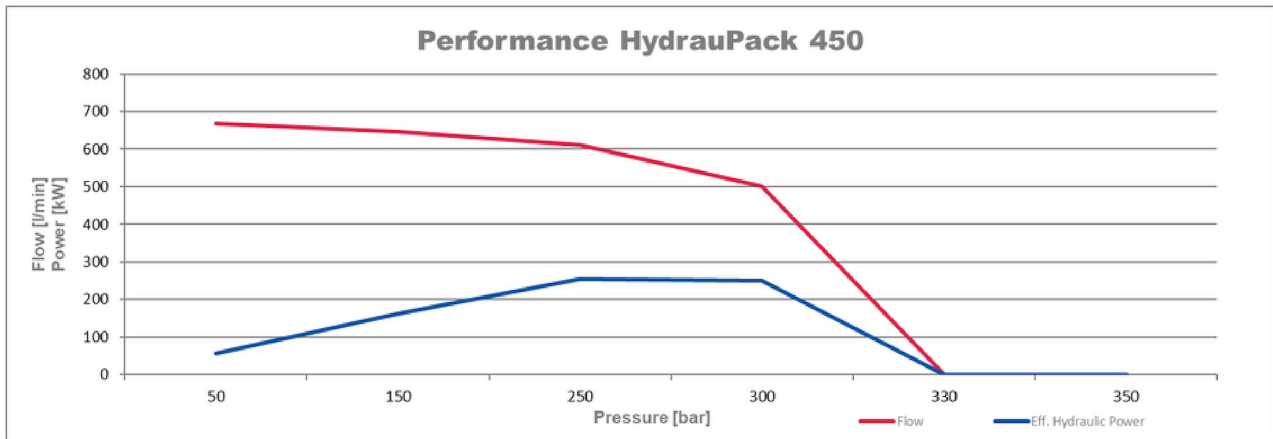

Specifications

Total weight incl. oil	7300	kg
Hydraulic oil tank capacity	1200	liter
Fuel tank capacity	700	liter
Operational temperature	-10 to +45	°C

Technical specifications

Max. working pressure	350	bar
Max. output flow	660	liter/min
Total engine power	391	kW @ 1800 rpm (25 °C)
Cooling capacity air/oil	90	kW @ ΔT = 25 °C
Hydraulic fluid	H(V)LP ISO VG 46	
Connection DOP Pressure (P)	Stucchi VOF200 2" BSP N (Nipple)	
Connection DOP Tank (T)	Stucchi VOF200 2" BSP C (Coupler)	
Connection DOP Drain (L)	Stucchi VOF100 1" BSP C (Coupler)	
Connection Cutter Forward (A)	Stucchi VOF100 1" BSP N (Nipple)	
Connection Cutter Reverse (B)	Stucchi VOF100 1" BSP N (Coupler)	
Connection Cutter Drain (L)	Snap-tite VHC8-8RP (Coupler)	