



HydrauPack 500



Features

- Diesel driven hydraulic power unit
- Intelligent electronic control system
- Open hydraulic circuit
- Equipped with boost pump
- Lloyd's Register offshore certified acc. to DNV rules 2.7-1 CSC and EN12079 incl. rigging
- Extra temperature controlled cooling and filtration systems.

Benefits

- 24/7** 24/7 (de)mobilisation, installation and commissioning
- ✓ Guaranteed flexibility and high availability
- ⚙️ Maintenance during the project
- € Clear budget and manageable costs

Specifications HP500

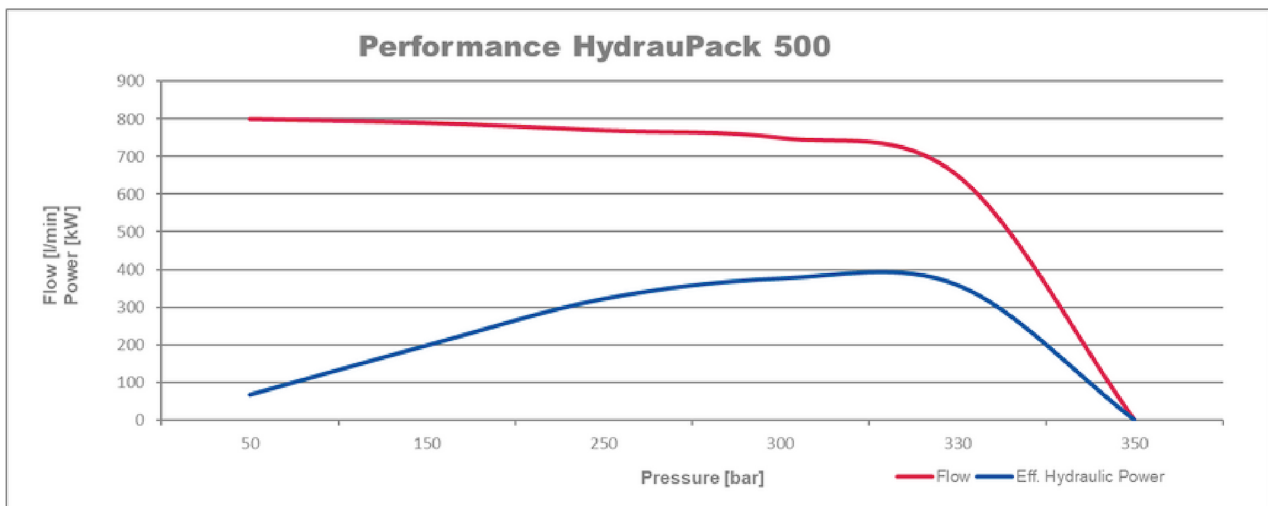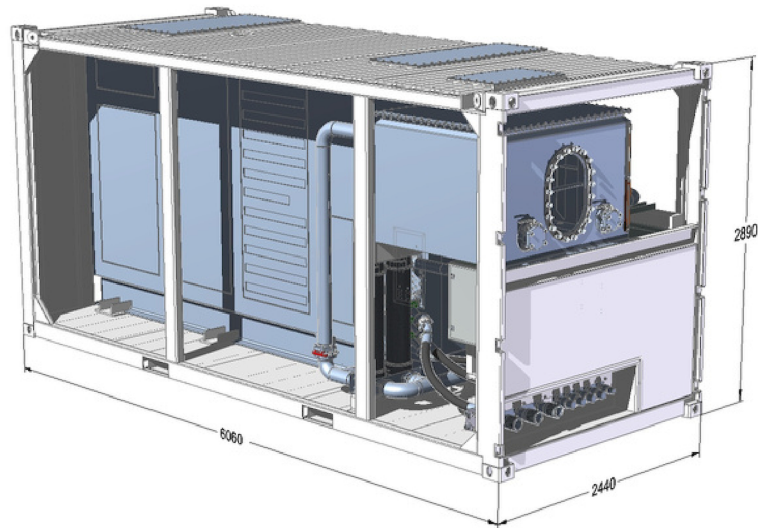

Specifications		
Total weight excl./incl. oil	14000 / 18500	kg
Hydraulic oil tank capacity	3500	liter
Fuel tank capacity	1300	liter
Operational temperature	-15 to +40	°C
Technical specifications		
Max. working pressure	350	bar
Max. output flow	950	liter/min
Max. output flow @ 350 bar	680	liter/min
Total engine power	494	kW (25°C)
Effective hydraulic power	410	kW (25 °C) approx.
Boost pump	195	liter/min @ 25 bar
Hydraulic fluid	H(V)LP ISO VG 46	
Pressure (P)	3 pcs Q.C. Snap-tite series 75, 2" (male)	
Return (T)	4 pcs. Q.C. Tema T20020, 2" (male)	
Drain (D)	Q.C. Tema T15020 , 1-1/2" (male)	
Auxiliary (A + B)	1/2" BSP, 16S, 4 pcs	
Boost pressure (PB)	2" SAE 3000 psi	
Flush (F)	1" BSP, 28L	
Filling point	Q.C. flat face acc. ISO 16028, 1/2" (male)	
Power supply nominal	400/440 VAC, 32 A, 50/60 Hz, 3 phase +E	