



# HydrauPack 55E

## Features

- Open hydraulic circuit with pressure and load sense control
- Connection for electric remote control
- Lloyd's Register offshore certified acc. to DNV rules 2.7-1 CSC and EN12079 incl. rigging
- Combinable with other HP 55E units for higher output flow
- Integrated hydraulic oil circulation cooler
- Combinable with extra tank for higher oil tank volume

## Benefits

**24/7**

24/7 (de)mobilisation, installation and commissioning



Maintenance during the project





Guaranteed flexibility and high availability



Clear budget and manageable costs

# Specifications HP55E

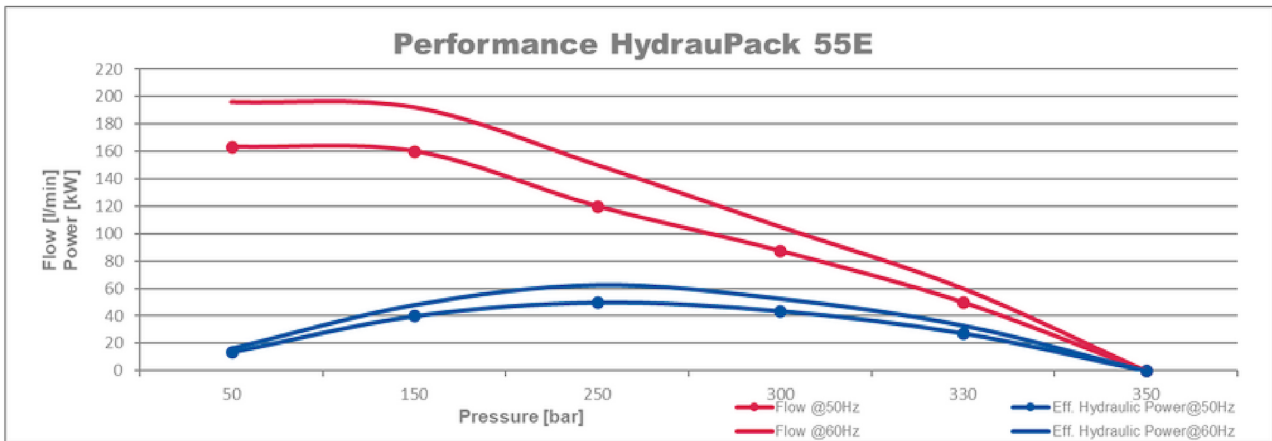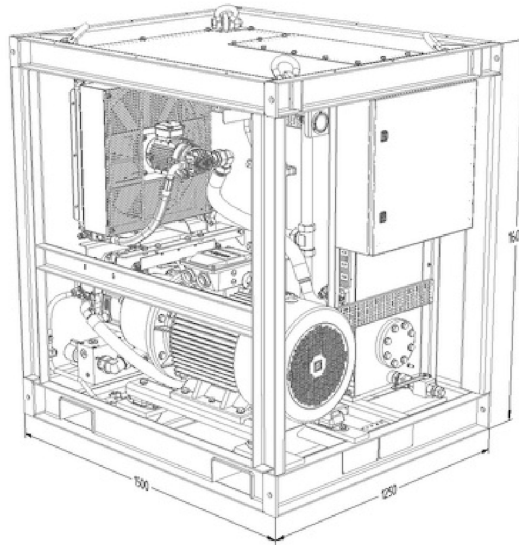

## Specifications

Total weight excl./incl. oil	1607 / 2000	kg
Hydraulic oil tank capacity	450	liter
Operational temperature	-20 to +50	°C

## Technical specifications

Max. working pressure	350	bar
Max. output flow	165	liter/min @ 50 Hz
	200	liter/min @ 60 Hz
Electric motor power	55	kW @ 400 VAC (50 Hz)
	63	kW @ 440 VAC (60 Hz)
Flush capacity	20 - 24	liter/min (50-60 Hz)
Hydraulic fluid	H(V)LP ISO VG 46, 68	
Power supply nominal	400 VAC	(50 Hz) - 105 A (3P + E)
	440 VAC	(60 Hz) - 110 A (3P + E)
Pressure (P)	QC 1" Snap-tite 75 N 16-16 RP	
Return (T)	QC 3/4" Snap-tite 71-3 C 12-12 RP	
Drain (D)	QC 1/2" Snap-tite 71-3 C 8-8 RP	
Load sense (LS)	QC 1/2" Snap-tite 71-3 N 8-8 RP	
Flush (F)	QC 1/2" Snap-tite 71-3 C 8-8 RP	
Filling point	QC 1/2" flat face acc. ISO 16028 (male)	
Included	Power connector on unit	12A - 6h, 5-pole