

HydrauWinch 50 CT

Features

- 50 mton winch, fitted in hoisting frame
- Both local and remote operation
- Wire length measurement, including zeroing function
- Bumpless shifting between CT and normal operation
- Fail safe band brake ensures safe operation
- Recommended CT max. is approx. 50% of max. line pull

Benefits

24/7

24/7 (de)mobilisation, installation and commissioning



Maintenance during the project




Guaranteed flexibility and high availability



Clear budget and manageable costs

Specifications HW50 CT

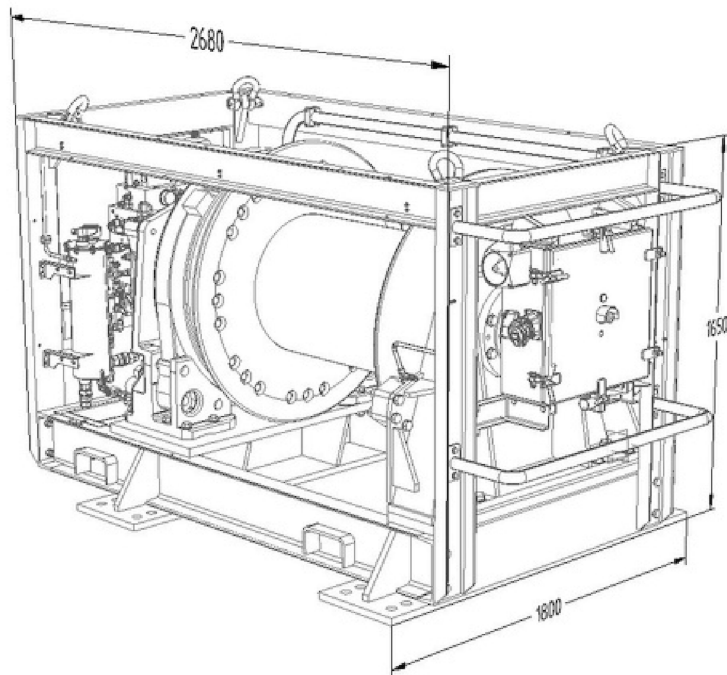

Specifications		
Total weight excl. wire	6400	kg
Drum diameter	610	mm (ungrooved)
Drum length	1050	mm
Operational temperature	-20 to +50	°C
Technical specifications		
Max. line pull 1st layer	50	mton
Max. brake holding capacity	60	mton (1st layer)
Max. speed 1st layer	9	m/min @ 200 l/min
Hydraulic supply	200	l/min
	280	bar
Max. wire diameter	44	mm (not included)
Wire capacity (44 mm)	500	m
Pressure (P)		SAE 1,5" - 6000#
Return oil (T)		SAE 2,5" - 6000#
Drain (D)	28L	
Power supply nominal		230 VAC 50 Hz - 6A
Power receptacle		16 A, IEC 60309