



# HydraWinch U8PF


## Features

- Umbilical winch
- Possibility to mount project specific swivel joint
- Offshore certified acc. to DNV rules 2.7-3 and EN12079-1 incl. rigging
- Provided with a ladder to enter the rooftop
- No dedicated hydraulic power pack to drive the winch motor
- Crash frame with integrated lifting lugs and forklift trays

## Benefits

- 24/7** 24/7 (de)mobilisation, installation and commissioning
-  Maintenance during the project
-  Guaranteed flexibility and high availability
-  Clear budget and manageable costs

## Specifications HWU8PF

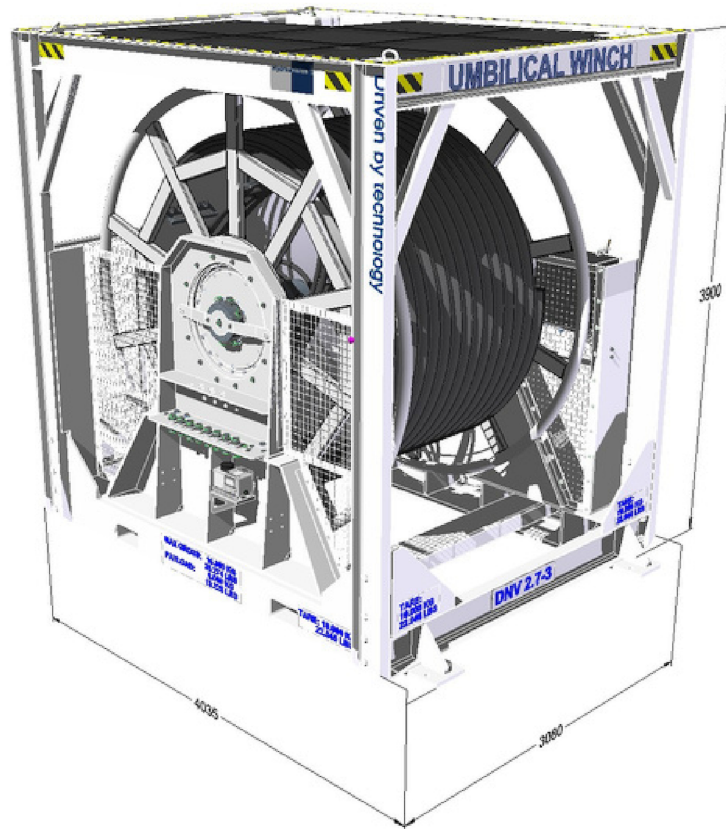

Specifications		
Total weight incl. umbilical	16 000	kg
Drum diameter	2300	mm (ungrooved)
Drum length	1800	mm
Operational temperature	-20 to +50	°C
Technical specifications		
Max. line pull 1st layer	50	kN
Holding capacity 1st layer	85	kN
Line speed 1st layer	0-25	m/min
Hydraulic supply	60	l/min
Max. umbilical diameter	180	mm
Wire capacity (120 mm)	645	m (in 5 layers)
Wire capacity (180 mm)	250	m (in 3 layers)
A	Quick connector	WA0604400 3/4" BSPP Male
C	Quick connector	WA0604400 3/4" BSPP Male
D1	Quick connector	WA0603700 1/2" BSPP Female
D2	Quick connector	WA0605700 1" BSPP Female
Swivel		8 fold 1-1/2" BSP